


BOLLAR RANGE - GARDEN

OUTDOOR

BOLLAR LIGHT

BOLLAR RANGE - GARDEN

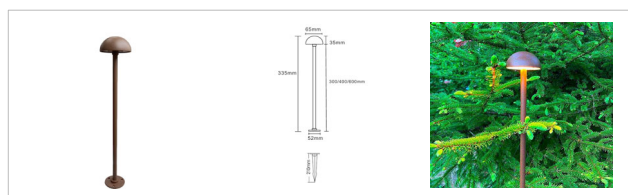

bridgelux®

CREE

OSRAM

SAMSUNG



PRODUCT OVERVIEW

Item Code	699246209942	699246209959	699246209966
Code	BL-2	BL-2	BL-2
Product Name	Bollar Range	Bollar Range	Bollar Range
Power	3W	3W	3W
Input Voltage	DC24V	DC24V	DC24V
Total Lumen Efficiency	702 lum	702 lum	702 lum
LED CHIP BRAND	Bridgelux/samsung/Cree/Osram	Bridgelux/samsung/Cree/Osram	Bridgelux/samsung/Cree/Osram
CRI	Ra≥90 / Ra≥95 (On request)	Ra≥90 / Ra≥95 (On request)	Ra≥90 / Ra≥95 (On request)
CCT	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
Beam Angle	95°	95°	95°
Lamp Cup	Corten/Black/Dark Gray	Corten/Black/Dark Gray	Corten/Black/Dark Gray
IP Rating	IP65	IP65	IP65
Driver Type	EAGLERISE/MW/SWARVEN	EAGLERISE/MW/SWARVEN	EAGLERISE/MW/SWARVEN
Material	Aluminum	Aluminum	Aluminum
Dimention	D65×H300mm	D65×H600mm	D65×H800mm
Manufacturer's Warranty	5 years	5 years	5 years
Installation method	Base, spike included.	Base, spike included.	Base, spike included.

Swarven web : <https://swarven.com/>

Lumen efficiency can be increased upon request and based on the required quantity.

For coding pearpose

1-CCT :- For 2700K add W to code, For 3000k add L to code, For 4000K add D to code, for 6500K add S to code & For Tunable(2700K-6500K) add Z to code

2- Voltage : Put the number of the voltage (7 or 12)

3- Beam angle : Put the number of the Angle (24° or 38°)

4- Put I with No. that need IP (20°40°&44°) (Ex : CR- Code , 7- W ,2700K - K, 24°- Beam Angle , IP20 - IP rating , D - Dali)

5- Driver : (Triac, Leading Edg,0-10v,1-10v,zigbee & dally on required) (On / Off) ST, Trick (T),(0 - 10 v) V, (1 - 10 v) V1 & Dali (D)

6- Emargency add EM to code (EM - Emargency)