


RECESSED DOWNLIGHT

FIX RANGE

INDOOR

RECESSED DOWNLIGHT

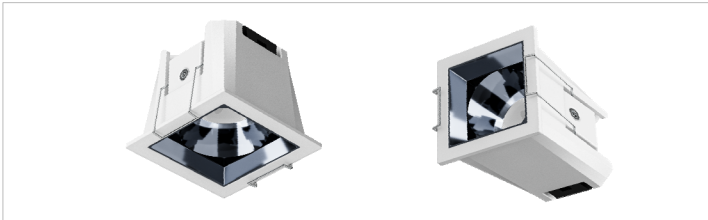

bridgelux®

CREE

OSRAM

SAMSUNG



PRODUCT OVERVIEW

ITEM CODE	680101439611	680101439628
DWG. Code	SQ	SQ-1
Product Name	FIX RANGE	FIX RANGE
Power	7W	10W
Input Voltage	85-240V	85-240V
Total Lumen Efficiency	630 lum	900 lum
LED CHIP BRAND	Bridgelux/samsung/Cree/Osram	Bridgelux/samsung/Cree/Osram
CRI	Ra≥90 / Ra≥95 (On request)	Ra≥90 / Ra≥95 (On request)
CCT	2700K/3000K/4000K/6500K	2700K/3000K/4000K/6500K
Beam Angle	24°/36°/60°	24°/36°/60°
Lamp Cup	Black / White	Black / White
IP Rating	IP20 / IP 40	IP20 / IP 40
Driver Type	SWARVEN	SWARVEN
Material	Aluminum / Heat Sink	Aluminum / Heat Sink
Cutout	L110*W55	L150*W75
Dimension	L118.5*W62.5*H51	L162.5*W85*H59
Manufacturer's Warranty	5 years	5 years
Installation method	Recessed Downlight	Recessed Downlight

Swarven web : <https://swarven.com/>

Lumen efficiency can be increased upon request and based on the required quantity.

For coding pearpose ,

1-CCT :- For 2700K add W to code, For 3000K add L to code, For 4000K add D to code, for 6500K add S to code & For Tunable(2700K-6500K) add Z to code

2- Voltage : Put the number of the voltage (7 or 12)

3- Beam angle : Put the number of the Angle (24° or 38°)

4- Put I with No. that need IP (20°40°&44°) (Ex : CR- Code , 7- W ,2700K - K, 24°- Beam Angle , IP20 - IP rating , D - Dali)

5- Driver : (Triac, Leading Edg, 0-10v,1-10v,zigbee & dally on required) (On / Off)ST , Trick (T) , (0 - 10 v) V , (1 - 10 v) V1 & Dali (D)

add EM to code (EM - Emergency)